



# SAVET® LOW PROFILE COMMERCIAL SERIES – S-LP



For environmental control and personnel comfort up to 10' high.

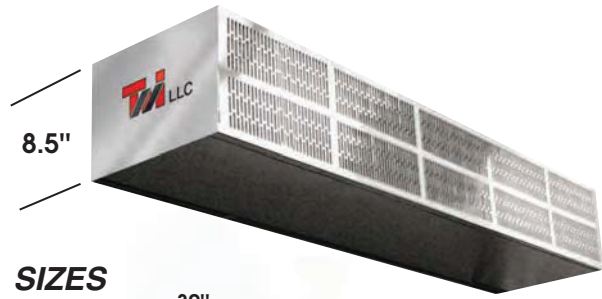

## SIZES

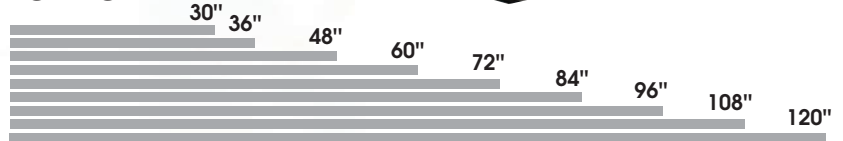

## FEATURES

- 1/5 horsepower, variable-speed motors
- Stainless steel, one-piece construction
- Low profile design – only 8.5" high
- Unmatched air flow uniformity
- Includes filters for improved air quality
- Exceptionally low noise levels (53 dBA low speed)
- Electric, hot water, or steam heat optional
- Single-phase or three-phase power
- Two-year parts warranty for unheated units (18 months for heated units)
- Includes threaded inserts for top mounting



## APPLICATIONS

- Drive-Thru Windows
- Concession Stands
- Patios
- Office and Employee Entrances
- Interoffice and Commercial Separation
- Hospital Entrances and Hallways
- Retail and Commercial Entrances
- Restaurant and Food Service Entrances
- Restaurant Smoking Areas
- Hotels, Casinos, Resort Entrances
- Walk-in Coolers
- Paint Booths
- Schools



LOW PROFILE COMMERCIAL SERIES – S-LP			
MODEL	S-LP-30-1-VS	S-LP-36-1-VS	S-LP-42-1-VS
Nozzle Width (in.)	29	35	41
Number of Motors	1	1	1
Horse Power per Motor	1/5	1/5	1/5
Max. FPM at Nozzle	3100	3100	3100
Avg. FPM at Nozzle.	2100	2200	2150
CFM at Nozzle	925	1215	1380
Outlet Vel. Uniformity (%)	92%	95%	95%
Shipping Wt. Unheated (lbs.)	45	55	65
Heater kW	8	8	8
Temp. Rise	24	22	20
Amp Draw* 208/1/60	38.5	38.5	38.5
Amp Draw* 240/1/60	33.3	33.3	33.3
Amp Draw* 208/3/60	22.2	22.2	22.2
Amp Draw* 240/3/60	19.3	19.3	19.3
Amp Draw* 480/3/60	9.6	9.6	9.6
Shipping Wt. Heated	50	60	70

\* More than one power supply may be required.

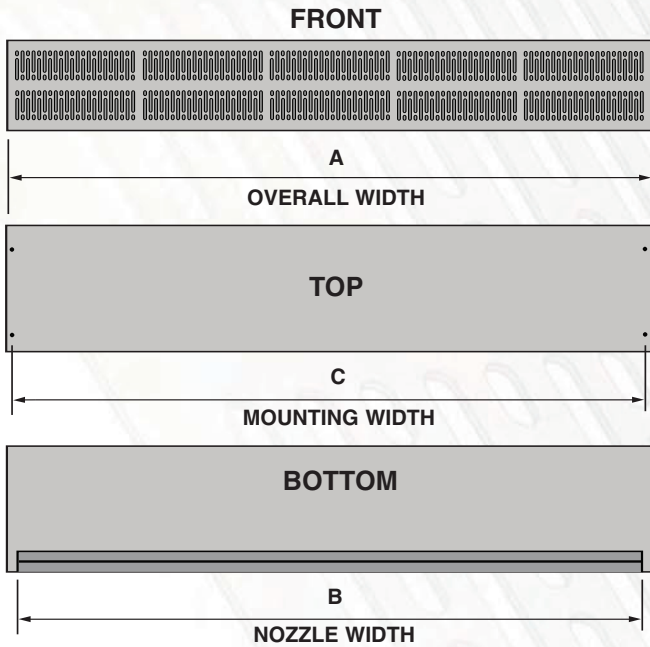

S-LP DIMENSIONS CHART					
Model	A	B	C	D	E
30"	31"	29"	30"	8.5"	11.875"
36"	37"	35"	36"	8.5"	11.875"
42"	43"	41"	42"	8.5"	11.875"
48"	49"	47"	48"	8.5"	11.875"
60"	61"	59"	60"	8.5"	11.875"
72"	73"	71"	72"	8.5"	11.875"
84"	85"	83"	84"	8.5"	11.875"
96"	97"	95"	96"	8.5"	11.875"
108"	109"	107"	108"	8.5"	11.875"
120"	121"	119"	120"	8.5"	11.875"

Standard Motor Voltages	Amps per Motor
110, 1ø, 60 hz	4.4
208, 1ø, 60 hz	2.0
230, 1ø, 60 hz	2.0
460, 1ø, 60 hz	1.1
575, 1ø, 60 hz	0.9



## BENEFITS

- Immediate energy savings – payback period as little as two years
- Prevents infiltration of cold or warm air, increasing employee and customer comfort
- Blocks outside drafts, flying insects and airborne pollutants
- Increased visibility – no physical barrier in the opening
- Heated units provide supplemental heat, increasing employee comfort

S-LP-48-1-VS	S-LP-60-1-VS	S-LP-72-2-VS	S-LP-84-2-VS	S-LP-96-2-VS	S-LP-108-2-VS	S-LP-120-2-VS
47	59	71	83	95	107	119
1	1	2	2	2	2	2
1/5	1/5	1/5	1/5	1/5	1/5	1/5
3100	3100	3100	3100	3100	3100	3100
2100	1985	2200	2150	2100	2200	2175
1545	1820	2425	2760	3095	3640	3970
92%	92%	95%	95%	95%	95%	95%
70	90	100	115	120	140	150
16	16	16	24	32	32	32
33	29	22	29	33	29	27
N/A	N/A	N/A	N/A	N/A	N/A	N/A
N/A	N/A	N/A	N/A	N/A	N/A	N/A
44.5	44.5	44.5	66.7	88.9	88.9	88.9
38.5	38.5	38.5	57.8	77.1	77.1	77.1
19.3	19.3	19.3	28.9	38.5	38.5	38.5
85	95	105	120	125	145	160