

TYPE & THICKNESS OF DOOR:

COOLER FREEZER 4" THICK 6" THICK

OPENING SIZE:

FINISHED OPENING WIDTH (W.I.C.):
FINISHED OPENING HEIGHT (H.I.C.): WALL THICKNESS:

ENTER ROOM TEMPERATURES:

TEMPERATURE WALL SIDE: F (PLEASE PROVIDE)
TEMPERATURE TRACK SIDE: F (PLEASE PROVIDE)

CLADDING - TRACK SIDE:

EMBOSSD WHITE GALVANIZED.	SMOOTH WHITE GALVANIZED
EMBOSSD BLACK GALVANIZED	SMOOTH GALVALUME
EMBOSSD GALVALUME	SMOOTH WHITE ALUMINUM
EMBOSSD WHITE ALUMINUM	STAINLESS STEEL, #4 FINISH
EMBOSSD MILL ALUMINUM	
CUSTOM	

CLADDING - WALL SIDE:

EMBOSSD WHITE GALVANIZED.	SMOOTH WHITE GALVANIZED
EMBOSSD BLACK GALVANIZED	SMOOTH GALVALUME
EMBOSSD GALVALUME	SMOOTH WHITE ALUMINUM
EMBOSSD WHITE ALUMINUM	STAINLESS STEEL, #4 FINISH
EMBOSSD MILL ALUMINUM	
CUSTOM	

VISION WINDOW:

HEATED NON-HEATED 14" x 14" 14" x 24"

KICK PLATE - TRACK SIDE:

1/16" DIAMOND PLATE	1/8" DIAMOND PLATE	STAINLESS STEEL
12" TALL 24" TALL	36" TALL 48" TALL	Other:

KICK PLATE - WALL SIDE:

1/16" DIAMOND PLATE	1/8" DIAMOND PLATE	STAINLESS STEEL
12" TALL 24" TALL	36" TALL 48" TALL	Other:

CASINGS AND HEADER:

TRACK SIDE:
MOLDED PLASTIC POLYMER (MPP)(STD) METAL CLAD MPP

MIRROR SIDE (OPTIONAL):
MOLDED PLASTIC POLYMER (MPP) METAL CLAD MPP

THRU WALL (OPTIONAL):
MOLDED PLASTIC POLYMER (MPP) METAL CLAD MPP

VARIABLE SPEED, HEAVY DUTY OPERATOR:

1900-RLS, NEMA 4 CONTROL, STANDARD MOTOR/REDUCER PACKAGE
1900-RLS, NEMA 4 CONTROL, WASH DOWN MOTOR/REDUCER PACKAGE

VOLTAGE:
120/1/60 240/1/60

CONTROLS:
STEP CONTROL (PULL TO OPEN, PULL TO CLOSE)
TIMER TO CLOSE (PULL TO OPEN, TIME DELAY TO CLOSE)
3-BUTTON CONTROL (OPEN, CLOSE, STOP)

SAFETY DEVICES:
DUAL SAFETY BEAMS
PRESENCE SENSOR QTY:

ACTUATION:
PULL CORD ON BOTH SIDES
NOTE: HEATED PULL CORD STANDARD FOR FREEZER DOORS.
3-BUTTON STATION, NEMA 1 QTY:
3-BUTTON STATION, NEMA 4 QTY:
RADIO TRANSMITTER AND RECEIVER QTY:
MOTION SENSOR QTY:
BY OTHERS

ADDITIONAL OPTIONS:

HASP LOCK WITH ELECTRICAL INTERLOCK, TRACK SIDE
TRACK HOOD STAINLESS POWDER COATED
ELEVATED COOLER/FREEZER FLOOR FLOOR THICKNESS:
JAMB WALL CAPS, NO INSERTS JAMB WALL CAPS WITH INSERTS
OUTER WIDTH: OUTER HEIGHT: INSET:

SPECIAL INSTRUCTIONS TO MANUFACTURER:





Chase Doors

Tel: (800) 543-4455 FAX: (800) 978-6570
www.chasedoors.com

JOB	CUSTOMER NO:	NO. PRINTS	FOR	DATE	REVISED
	CHASE ORDER NO:				
SOLD TO	DRAWN BY:				
	SHEET OF				

ELECTRIC BI-PARTING SLIDE DOOR with 1900-RLS OPERATOR

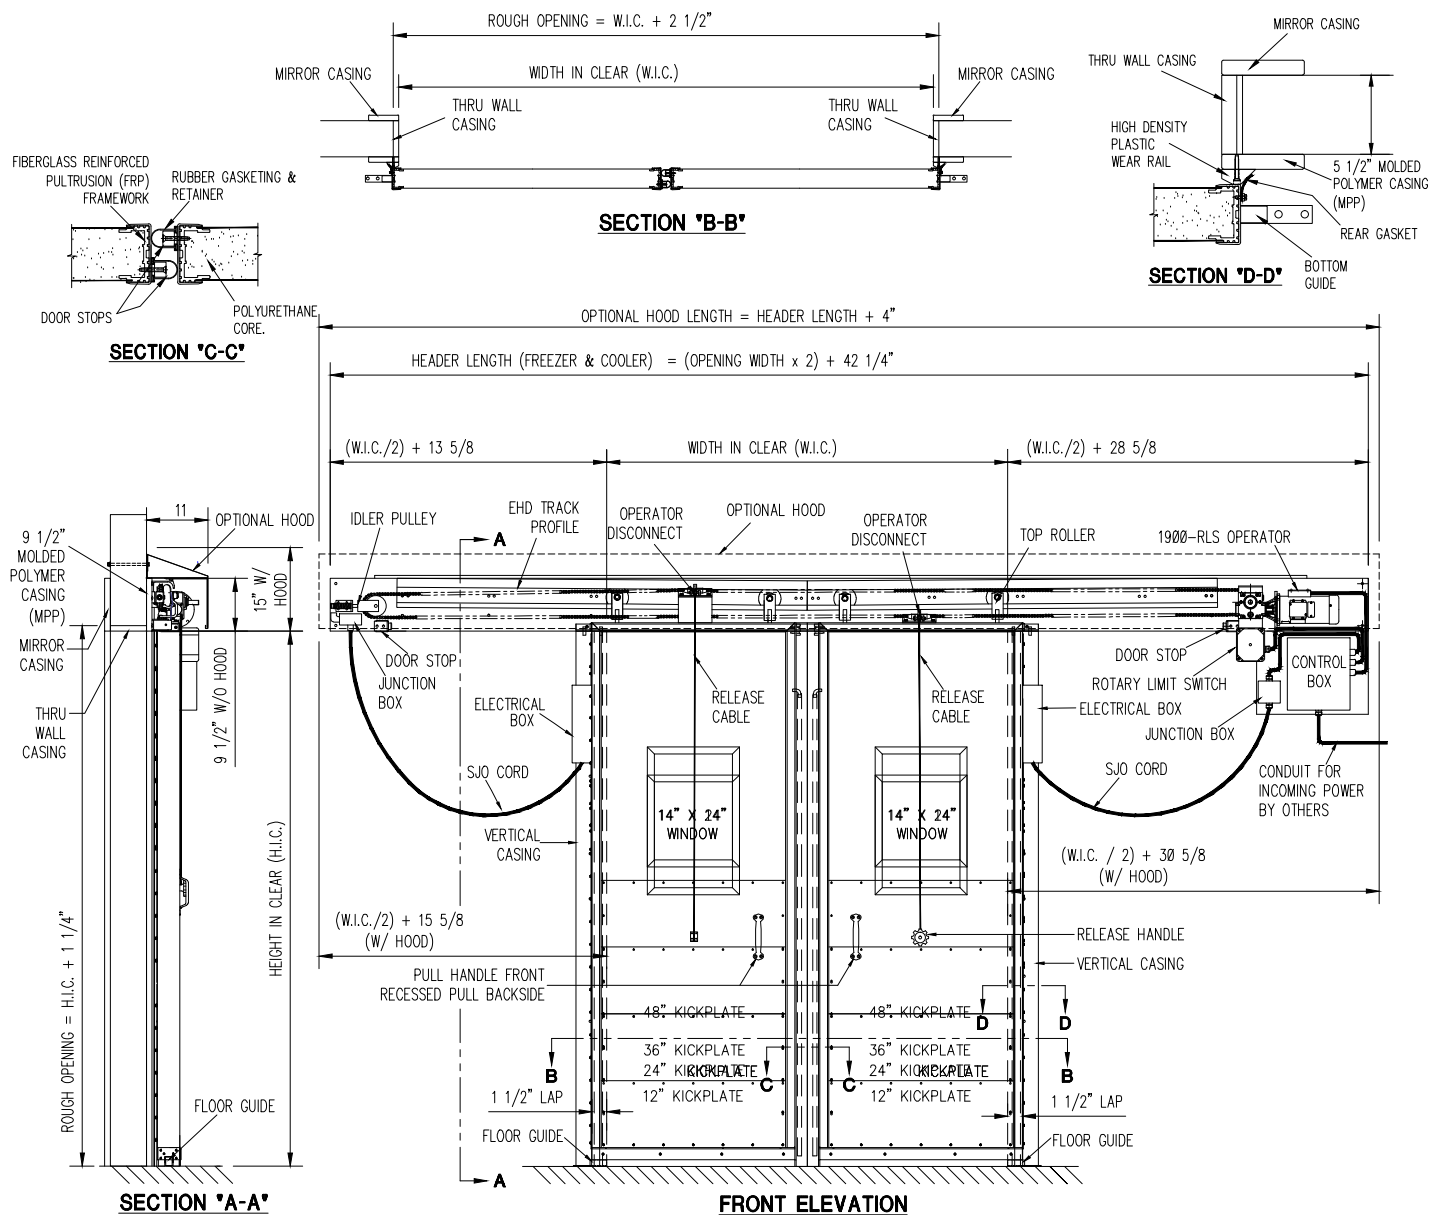


 © CENTER PARTING
 SLIDE PLAN

JOB	CUSTOMER NO:		NO. PRINTS	FOR	DATE	REVISED
	CHASE ORDER NO:					
SOLD TO	DRAWN BY:					
	SHEET	OF				