


MOTOR LOCATION MAY BE ABOVE OR BELOW THE ROLL, AND EXACT LOCATION CAN BE VARIED SLIGHTLY. SPECIFY RH OR LH.

LEFT HAND MOTOR SHOWN. RIGHT HAND OPPOSITE.

FOR OPENING HEIGHTS OVER 192"

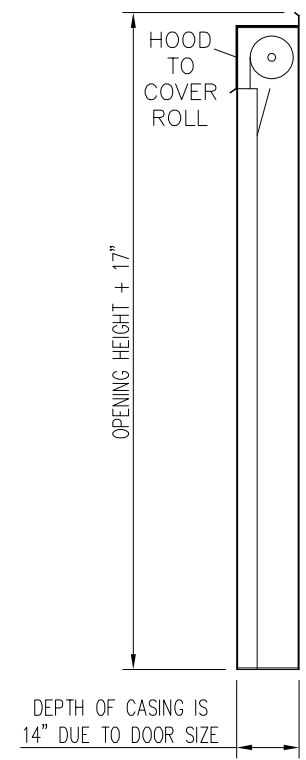

DEPTH OF CASING IS 14" DUE TO DOOR SIZE

- SCREEN MATERIAL:**
- BUG MESH _____
 - BIRD MESH _____
 - SOLID VINYL _____
 - BLUE ONLY _____

- COLOR:**
- BLUE _____
 - YELLOW _____
 - RED _____
 - BLACK _____
 - GRAY _____
 - ORANGE _____
 - GREEN _____
 - BEIGE _____

- IN-TUBE MOTOR** _____
- EXTERNAL MOTOR** _____
- MANUAL CHAIN HOIST** _____
- RH _____ LH _____

COMMENTS:

DURASHIELD W/ 14" HOOD CASING & 6" TRKS

UNLESS OTHERWISE SPECIFIED				MATERIAL: FINISH: SUPERSEDES INTERCHANGEABLE SUPERSEDED BY WEIGHT USED ON INTERCHANGEABLE			NAME: DURASHIELD W/ 14" HOOD CASING EXTERNAL MOTOR/ CHAIN HOIST
TOLERANCE MACHINED SURFACES					DR. BC _____ SCALE: NTS CK. _____ PART NO. _____		
RADI	FRACTIONS	DECIMALS	ANGLES		DATE 7/21//10		
	$\pm \frac{1}{64}$.XX $\pm .015$.XXX $\pm .005$	$\pm 1^\circ$	THIS DRAWING FURNISHED FOR ENGINEERING INFORMATION AND REFERENCE ONLY AND DOES NOT CONVEY ANY REPRODUCTION OR MANUFACTURING RIGHTS			