


MOTOR LOCATION MAY BE ABOVE OR BELOW THE ROLL, AND EXACT LOCATION CAN BE VARIED SLIGHTLY.

CLEAR OPENING HEIGHT	
CLEAR OPENING WIDTH PLUS 9"	
CLEAR OPENING WIDTH PLUS 15"	
CLEAR OPENING WIDTH	

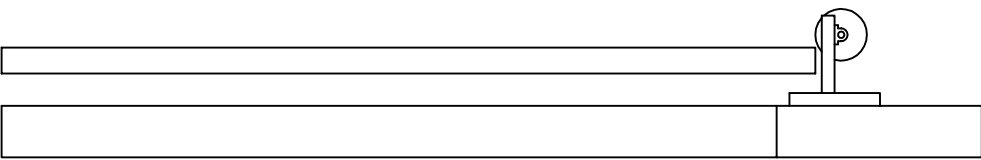

DISTANCE FROM WALL TO DOOR CENTER WILL VARY, DEPENDING ON EXISTING DOOR OR OBSTRUCTIONS.

- BUG MESH _____ BIRD MESH _____
- SOLID VINYL _____ BLUE ONLY _____
- COLOR: _____
- BLUE _____
- YELLOW _____
- RED _____
- BLACK _____
- GRAY _____
- ORANGE _____
- GREEN _____
- BEIGE _____
- MOTOR COVER: _____
- NONE _____
- GALVANIZED _____
- STAINLESS STEEL _____

COMMENTS:

UNLESS OTHERWISE SPECIFIED

TOLERANCE MACHINED SURFACES		
RADII	FRACTIONS	DECIMALS
	$\pm \frac{1}{64}$	XX $\pm .015$
		.XXX $\pm .005$
		ANGLES $\pm 1^\circ$

THIS DRAWING FURNISHED FOR ENGINEERING INFORMATION AND REFERENCE ONLY AND DOES NOT CONVEY ANY REPRODUCTION OR MANUFACTURING RIGHTS

FILE PATH:	
MATERIAL:	
FINISH:	
SUPERSEDES	
SUPERSEDED BY	
USED ON	

INTERCHANGEABLE	INTERCHANGEABLE
INTERCHANGEABLE	INTERCHANGEABLE
INTERCHANGEABLE	INTERCHANGEABLE
INTERCHANGEABLE	INTERCHANGEABLE

Chase Doors

NAME: DURASHIELD ISO, EXTERNAL MOTOR

DR. BC	SCALE: NTS
CK.	PART NO.
DATE 4/1/10	REV.