

# DOOR MEASUREMENTS FOR INJAMB

**TO PROMOTE A QUALITY PRODUCT FOR EACH INSTALL, IT IS VERY IMPORTANT TO PROVIDE ONE MEASUREMENT SHEET PER OPENING**

PLEASE NOTE: GUIDE TRACKS PROJECT 4" EACH SIDE INTO CLEAR OPENING. THE ROLL TUBE REDUCES THE CLEAR OPENING HEIGHT BY APPROXIMATELY 3/4" PER FOOT OF OPENING HEIGHT. JAMB WIDTH SHOULD BE A MINIMUM OF 3/4"(X)(OPENING HEIGHT IN FEET)+1".

TOP MEASUREMENT ON INJAMB DOORS IS CRITICAL! NEEDS TO BE WITHIN 1/8"

**COLOR OF SCREEN MESH**

- 1. BLUE
- 2. YELLOW
- 3. OTHER \_\_\_\_\_

Springload Manual

In-tube Motor


External Motor  
(Requires access to stud space next to jamb)

RIGHT

OR

LEFT

(Handing is determined looking at the door from the mounting side)

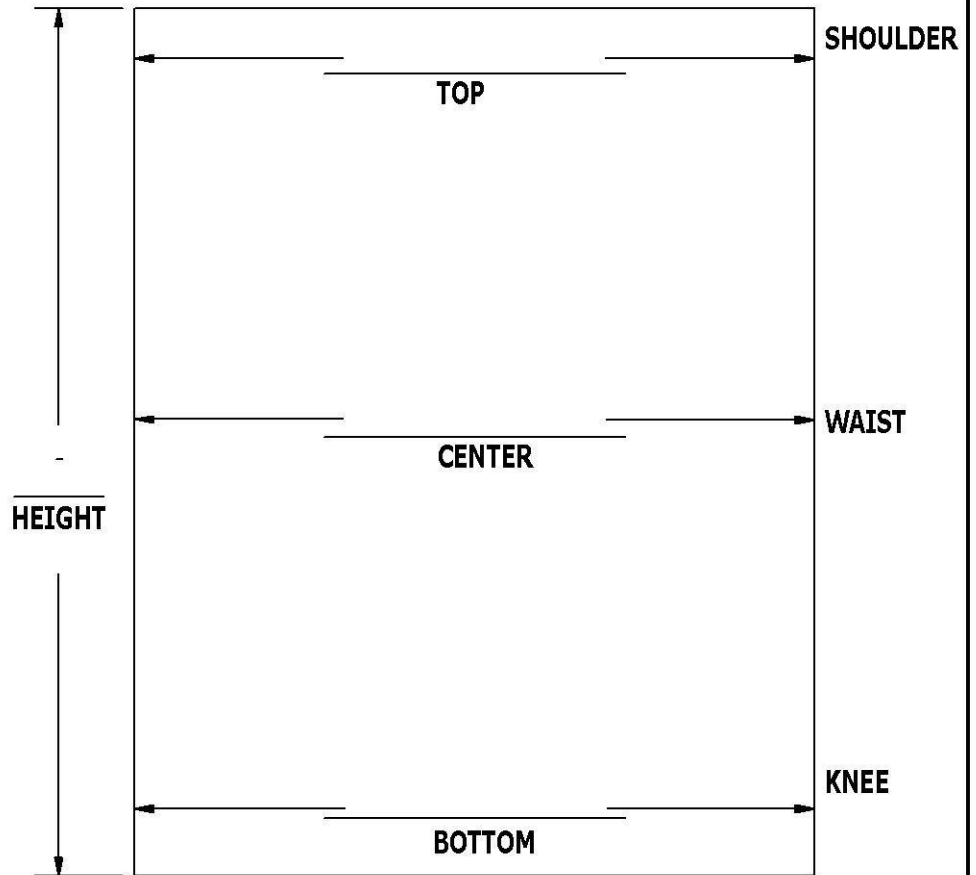

**PROVIDE MEASUREMENTS:**

**\* HEIGHT**

**\*WIDTH AT TOP, CENTER AND BOTTOM OF DOORWAY  
(INSIDE DIMENSIONS OF OPENING)**

Approved By \_\_\_\_\_